## TRIPOD ROOF KIT

**MODEL: WMTS-100** 

- Do Not Over Tighten Fasteners
- Do Not Leave Out or Use in High Winds

FOR USE WITH AMERISTEP'S 15' TRIPOD MODEL# WMTS-15R

Instruction and Safety Manual



#### Warning

Every year serious injury and even death occurs from hunting related falls. To ensure your safety, please COMPLETELY read and follow this safety manual and ALL warning labels BEFORE assembling, installing or utilizing this product.

Follow WMTS-15R Tripod Instructions for Tripod Setup.
DO NOT USE THIS PRODUCT IN HIGH WINDS OR OTHER INCLEMENT WEATHER.

DO NOT USE THIS PRODUCT BEFORE FULLY UNDERSTANDING ALL SAFETY WARNINGS AND INSTRUCTIONS. IF YOU HAVE QUESTIONS, ARE UNSURE ABOUT ANY INFORMATION OR NEED ADDITIONAL INFORMATION CONCERNING YOUR PRODUCT, CONTACT OUR CUSTOMER SERVICE DEPARTMENT AT 1-866-972-6168 OR VISIT **WWW.TREESTANDCUSTOMERSERVICE.COM**. KEEP AND MAINTAIN THIS SAFETY AND INSTRUCTION MANUAL IN A SAFE LOCATION FOR FUTURE REFERENCE.







# TRIPOD ROOF KIT

#### **MODEL: WMTS-100**


- Do Not Over Tighten Fasteners
- Do Not Leave Out in High Winds












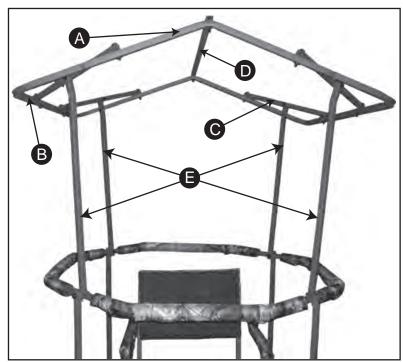

\*Roof Cover Not Shown to Show Details

#### Distributed by Tahsin Industrial Corp. USA 685 Route 10 East, Randolph, NJ 07869

## **Parts List**

Part # WRF-100

B 2 Roof Frame Side Part # WFS-100
C 4 Frame Brace Part # WFB-100

A 2 Roof Frame

**●** 1 Roof Top Part # WRT-100

**a** 4 Frame Supports Part # WFS-100

1 Roof Cover Part # WRC-100

#### **Hardware**

(50) 14 M10x50mm Bolt Part # 1055



#### A WARNING

You MUST use a Hoist system to lift the Roof to the Stand for installation DO NOT climb the Ladder with the Roof in Hand

#### AWARNING

NEVER stand on seat platform to attach roof.

#### AWARNING

DO NOT use this product in high winds or other inclement weather.


#### A WARNING

Follow WMTS-15R Tripod Instructions for Tripod Set-Up




©2012 (rev. 10/11)


# **ASSEMBLY INSTRUCTIONS PAGE 1**

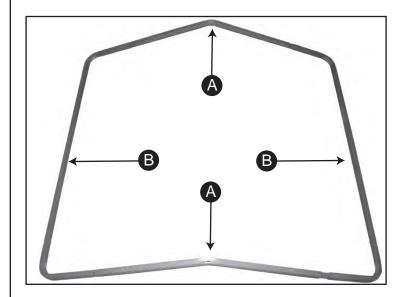


1. Insert each Roof Frame A into each Roof Frame Side B.

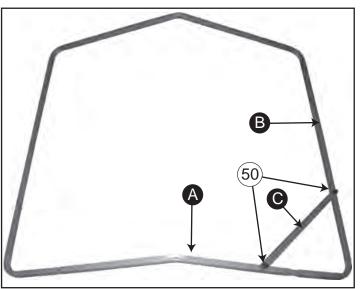

2. Attach Frame Brace **©** to the top of Roof Frame **A** and Roof Frame Side **B** using **1-M10x50mm Bolt** at each point.

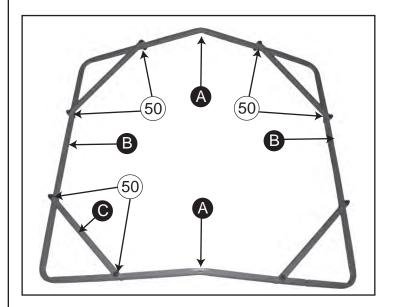


3. Attach the remaining Frame Braces to the top of Roof Frame and Roof Frame Sides using *1-M10x50mm bolt* at each point.

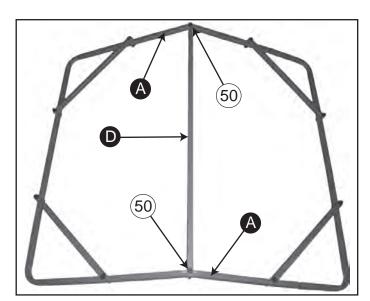


4. Attach Roof Top **①** on top the each Roof Frame **③** using **1-M10x50mm Bolt** on each side.

## **ASSEMBLY INSTRUCTIONS PAGE 2**

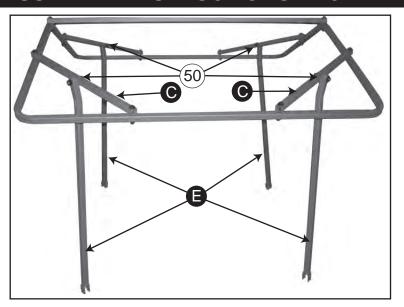

# 5. Attach each Frame Support to the center of each Frame Brace using 1-M10x50mm Bolt.

Make sure that the curved end of the Frame Supports are facing outward.

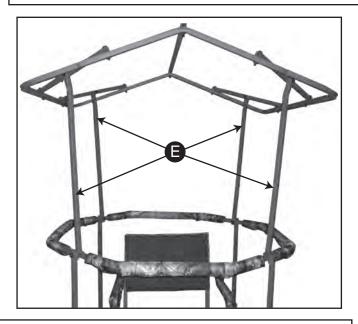

6. Attach each Frame Support to where the Shooting Rail is attached to the Tripod using the same bolts. The brackets on the Frame Supports will fit over the Shooting Rail.

Remove the bolts holding the shooting rail on the tripod one at a time.

Make sure that the peak of the roof kit is over the ladder. This will allow easier access to the seat.

#### AWARNING

Follow WMTS-15R Tripod Instructions for Tripod Set-Up

#### A WARNING

You MUST use a Hoist system to lift the Roof to the Stand for installation DO NOT climb the Ladder with the Roof in Hand

#### AWARNING

NEVER stand on seat platform to attach roof.



7. Attach Roof Cover f on top of the assembled Roof Kit.

Make sure that the peaks of the roof Cover match up with the Peaks of the Roof Frames.

Tie off where provided.

#### A WARNING

DO NOT use this product in high winds or other inclement weather.

© 2012 (rev. 10/11)