MODEL: WMTS-100

- Do Not Over Tighten Fasteners
- Do Not Leave Out or Use in High Winds

FOR USE WITH AMERISTEP'S 15' TRIPOD MODEL# WMTS-15R

Instruction and Safety Manual



A Warning


Every year serious injury and even death occurs from hunting related falls. To ensure your safety, please COMPLETELY read and follow this safety manual and ALL warning labels BEFORE assembling, installing or utilizing this product.

Follow WMTS-15R Tripod Instructions for Tripod Setup.

DO NOT USE THIS PRODUCT IN HIGH WINDS OR OTHER INCLEMENT WEATHER. DO NOT USE THIS PRODUCT BEFORE FULLY UNDERSTANDING ALL SAFETY WARNINGS AND INSTRUCTIONS. IF YOU HAVE QUESTIONS, ARE UNSURE ABOUT ANY INFORMATION OR NEED ADDITIONAL INFORMATION CONCERNING YOUR PRODUCT, CONTACT OUR CUSTOMER SERVICE DEPARTMENT AT 1-866-972-6168 OR VISIT WWW.TREESTANDCUSTOMERSERVICE.COM. KEEP AND MAINTAIN THIS SAFETY AND INSTRUCTION MANUAL IN A SAFE LOCATION FOR FUTURE REFERENCE.


Distributed by Tahsin Industrial Corp. USA 685 Route 10 East, Randolph, NJ 07869


SAFETY MUST BE YOUR FIRST PRIORITY WITH THIS PRODUCT

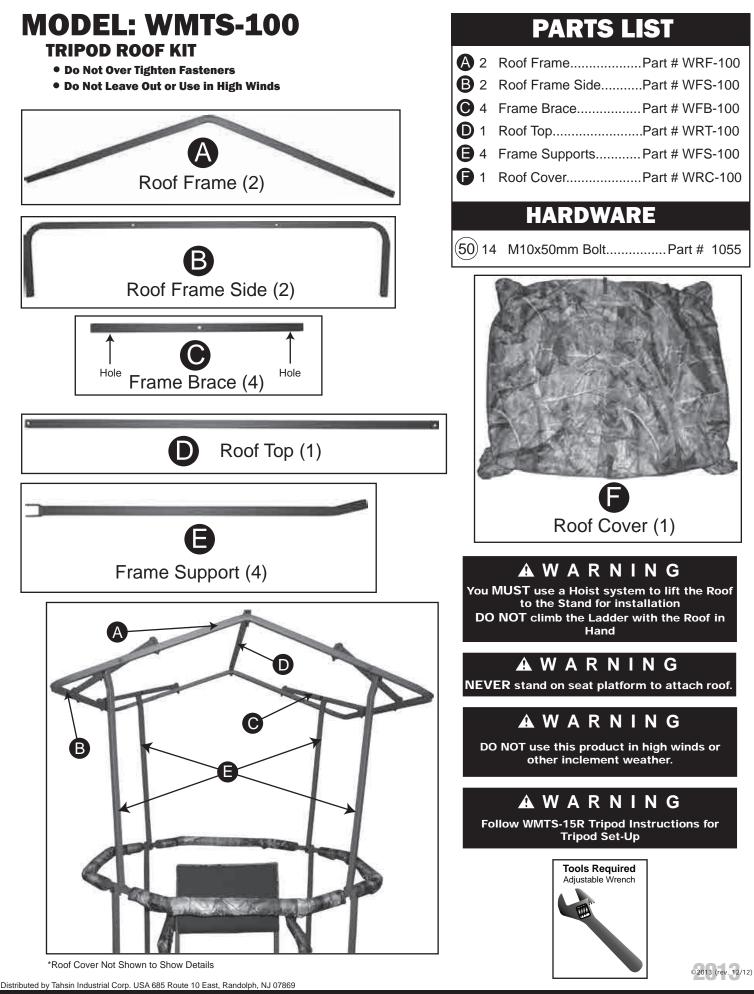

ASSEMBLY INSTRUCTIONS PAGE 1


MODEL: WMTS-100 TRIPOD ROOF KIT

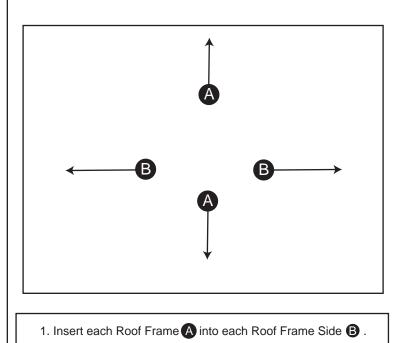

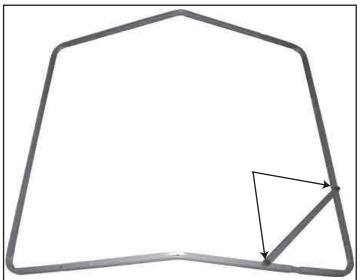


ASSEMBLY INSTRUCTIONS PAGE 2

MODEL: WMTS-100 TRIPOD ROOF KIT

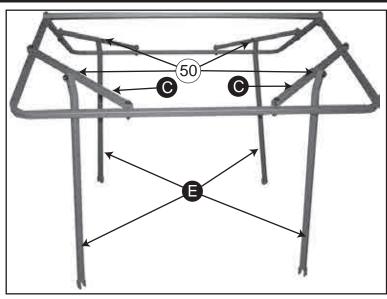

5. Attach each Frame Support **(B)** to the center of each Frame Brace **(C)** using **1-M10x50mm Bolt**. Make sure that the curved end of the Frame Supports are facing outward.

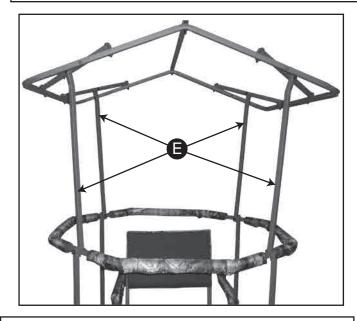

6. Attach each Frame Support **E** to where the Shooting Rail is attached to the Tripod using the same bolts. The brackets on the Frame Supports will fit over the Shooting Rail.

Remove the bolts holding the shooting rail on the tripod one at a time.

Make sure that the peak of the roof kit is over the ladder. This will allow easier access to the seat.

A WARNING

Follow WMTS-15R Tripod Instructions for Tripod Set-Up



You MUST use a Hoist system to lift the Roof to the Stand for installation DO NOT climb the Ladder with the Roof in Hand

A WARNING

NEVER stand on seat platform to attach roof.



7. Attach Roof Cover F on top of the assembled Roof Kit.

Make sure that the peaks of the roof Cover match up with the Peaks of the Roof Frames. Tie off where provided.

A WARNING

DO NOT use this product in high winds or other inclement weather.

©2013 (rev. 12/12)

Distributed by Tahsin Industrial Corp USA, 685 Route 10 East, Randolph, NJ 07869 CUSTOMER SERVICE DEPARTMENT 1-866-972-6168

WWW.TREESTANDCUSTOMERSERVICE.COM

Hunting For Low Prices?

These Items Now Available at Walmart and Walmart.com



LADDER