Model # 2012 Full Body Harness Components

Front

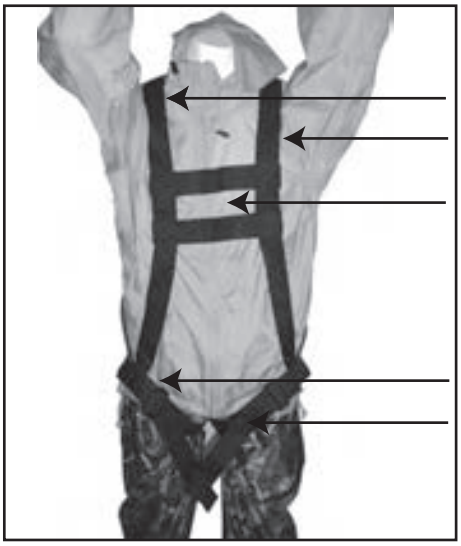

Left Shoulder Strap

Right Shoulder Strap

Double Chest Strap

Left Leg Strap

Right Leg Strap

Back

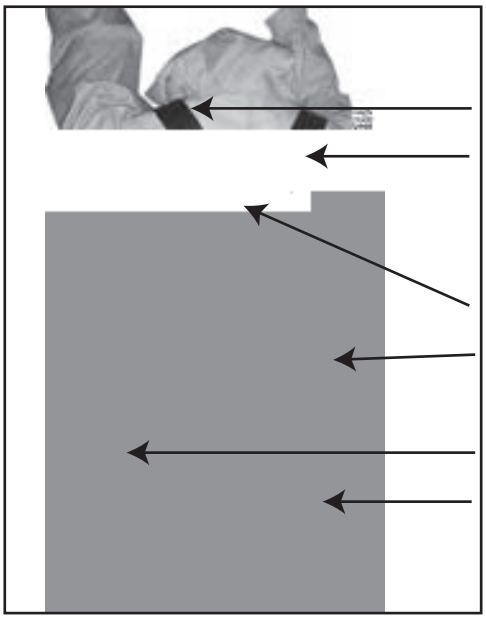

Left Shoulder Strap

Right Shoulder Strap

Tree Tether

Size Adjuster

Left Leg Strap

Right Leg Strap

Weight Limit of this harness is 300 lbs. including your body weight and the weight of your clothing and gear

Suspension Relief



Tree Strap

⚠ WARNING ⚠

ALWAYS read safety harness instructions before each use.

This safety harness should only be used with treestands as a restraint to prevent falling. **DO NOT** use the Safety Harness for any other purpose.

The total weight limit of this safety harness is **300 pounds**. **DO NOT** use the Safety Harness if you and your equipment weigh more than 300 pounds or if you are unsure as to whether you may exceed the weight limit. Exceeding the 300 pound weight limit may result in serious injury or death.

ALWAYS inspect the safety harness for signs of wear, damage, loose stitching or frayed parts before **EACH** use. If there are any signs of wear **DISCARD** the safety harness and replace with a new one. Using the safety harness with any signs of wear may result in serious injury or death.

DO NOT attempt to repair, worn, damaged, loose stitching, or frayed parts. Use of a repaired safety harness may result in serious injury or death.

NEVER tie a knot in the strapping of the safety harness. Tying a knot in the strapping of the safety harness may result in serious injury or death.

NEVER store the safety harness in direct sunlight or other elements when not in use. Storing the safety harness in direct sunlight or other elements may result in damage to the safety harness that may result in serious injury or death

ALWAYS make sure that your safety harness is put on and secured correctly. **DO NOT** use safety harness if you are not sure that it is put on correctly. Contact manufacturer for further instructions if you are unsure that safety harness is put on correctly. If harness is put on incorreclty it may result in serious injury or death.

ALWAYS check the harness to make sure it is safe before each use. Practice putting on the safety harness at ground level before using it at an elevated postition.

IDENTIFY the harness components which are described to the left.

DISCARD harness immediately after being subjected to a fall. Using a harness that has been subjected to a fall may result in serious injury or death.

PRIMAL VANTAGE CO.

Distributed by Primal Vantage Company Inc. 685 Route 10 Randolph, NJ 07869

©2012 (rev. 02/12)

2012 Full Body Safety Harness Instructions

(Front View)

(Rear View)

Put the harness on over your head. Make sure the Double Chest Straps are on your chest and the back of the harness forms an X on your back.

Be sure no webbing of your harness is twisted.

1) Wrap right leg strap around inner leg, feed through first slit on strap adjuster

2) Continue to feed the leg strap through second slit on strap adjuster, pull to tighten.

3) Feed the strap **AGAIN** through the original slit in the strap adjuster.

The strap MUST be fed back through the strap adjuster again or the strap will slide out.

4) Pull all extra slack of leg strap through and make sure strap is secured correctly through strap adjuster. Repeat steps 1-4 for left leg strap. Adjust size adjusters on back as necessary for a secure, snug fit.

WARNING: DO NOT wear Safety Harness if harness has been subjected to a fall. Discard immediately. Contact below for information.

PRIMAL VANTAGE CO.

Distributed by Primal Vantage Company Inc. 685 Route 10 East, Randolph, NJ 07869

©2012 (rev. 02/12)

2012 Full Body Safety Harness Instructions

Anytime you are using a treestand you must always wear a full body harness.

1) Insert the tree strap through the loop on the end of the tree tether.

2) Wrap the tree strap around the tree **ONLY ONCE** making sure the strap is not twisted.

3) Secure the tree strap using the slide adjuster **(See Slide Adjuster Instructions)**

4) Be sure the tree strap is above your head when you are seated in your tree stand.

Slide Adjuster Instructions

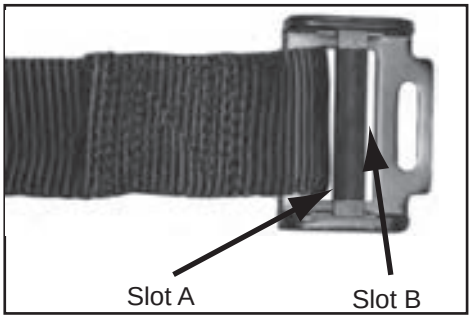

Wrap tether strap around tree once only

Insert strap through Slot A.

Thread strap through Slot B.
Pull strap to adjust tension.

Attached Tether to Tree

PRIMAL
VANTAGE CO.

Distributed by Primal Vantage Company Inc. 685 Route 10 Randolph, NJ 07869

©2012 (rev. 02/12)

Suspension Relief Instructions

This Suspension Relief System (SRS) is to allow relief from a person's weight on the lower extremities if suspended in a harness. The device is used to **HELP** maintain circulation and prevent blood pooling in the legs.

The Suspension Relief System is designed to be used in conjunction with a Fall Arrest System.

Never use **SRS** without being attached to a tree by your Safety Harness.
DO NOT use **SRS** to assist in climbing a tree.
This device is to be used with your safety harness if a fall occurs.
ALL users **MUST** have personal plan for escape/recovery if a fall occurs.
Hunt from the ground if escape or recovery is not possible.
ALL users **MUST** know and understand how to use this device **BEFORE** ascending a tree.
PRACTICE using this device **BEFORE** ascending a tree.

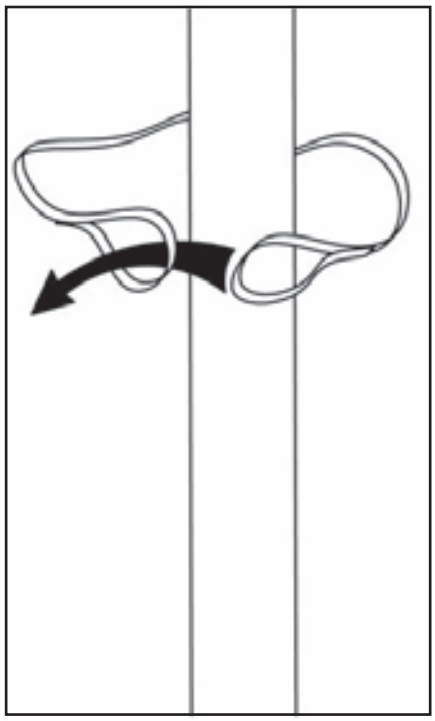

Step 1. Wrap strap around back of tree once and insert one of the looped ends through the other loop.

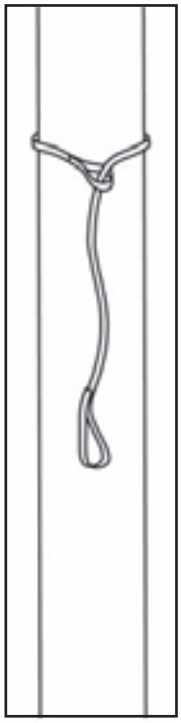

Step 2. Pull tight. Make sure that the loop is hanging and does not hang below your feet.

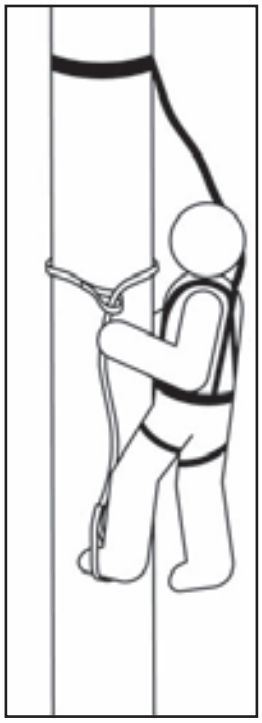

Step 3. Insert your foot into bottom loop that is hanging from tree. Lift yourself up by pressing your weight down into strap with your foot standing. This will remove tension from around legs and hips.

DO NOT PANIC!!! Remain calm and implement your practiced rescue, relief and recovery plan.

PRIMAL
VANTAGE CO.

Distributed by Tahsin Industrial Corp USA 685 Route 10 Randolph, NJ 07869

©2012 (rev. 10/11)